



FV350

Multimodal Finger Vein and Fingerprint recognition Access Control terminal


FV350 is a multi-biometric reader capable of capturing and processing finger vein and fingerprint biometric data at the same time. Ergonomic, intuitive and highly secured, FV350 leads us to a new era of enhancing security with biometrics. Its infra-red rays illuminates the vein pattern which is then converted into a biometric template. Both the vein and fingerprint templates are then stored in the database for subsequent matching.

Features

- Multi-biometric reader with finger vein and fingerprint authentication
- Unsurpassed performance with highly accurate finger vein recognition technology
- Intuitive graphical user interface and touch screen display for rich user experience
- Can store upto 1000 vein and 1000 fingerprints
- and identify in less than 2 seconds
- Complete built in Access Control functionality and can operate without a dedicated computer.
- Flexibility to use any of the three credentials i.e. finger vein, fingerprint and password
- Advanced access control functions based on time zones, groups and unlock combinations

Multi-Biometric features extraction process:

Press the finger on the sensor → Capture both fingerprint and finger vein images →
Get the unique points and generate templates → Compare that templates with the data which in device's database → Show the result on the device screen.

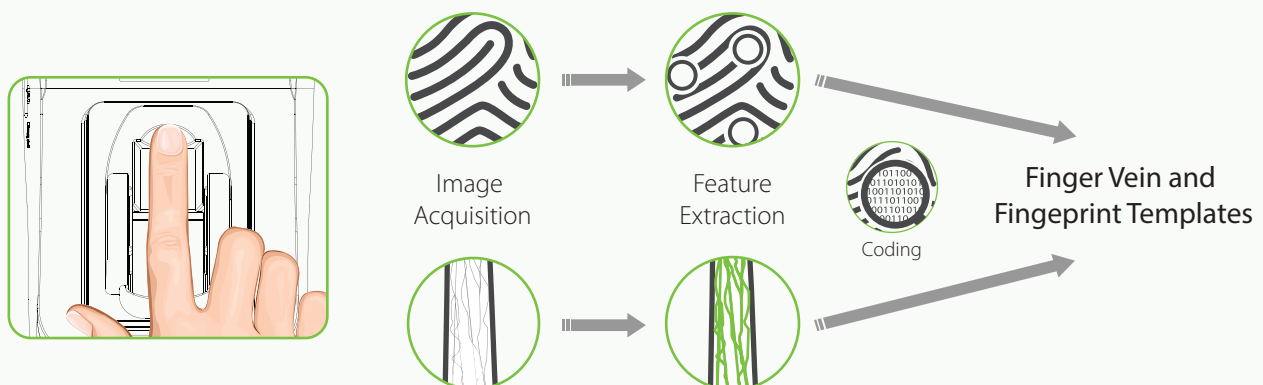

Specifications

| | |
|-----------------------|---|
| Core board | ZMM220 |
| CPU | 1.2GMHz |
| Communication | TCP/IP, RS485 |
| Vein Capacity | 1,000 |
| Fingerprint Capacity | 1,000 |
| RF Card | EM, Mifare (optional 2,000) |
| Authentication | Finger vein, fingerprint, password, card (optional) |
| Auxiliary terminal | 1 Aux. input |
| Wiegand | Wiegand in and out |
| Display | 2.8-inch capacitive screen |
| Operating Voltage | DC 12V 3A |
| Operating Temperature | -10°C ~ 45°C |
| Dimensions | 232mm×91mm×117mm(length×width×thickness) |
| SDK | PULL SDK (new firmware) |

Optional Accessories



Exit Button



Break Glass Button



Electric Lock




Alarm




Sensor

Configuration

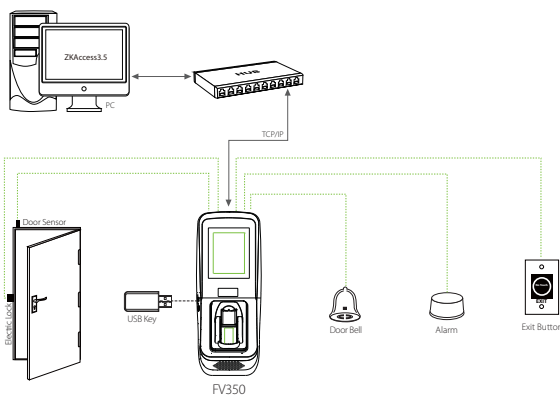

Dimensions (mm)

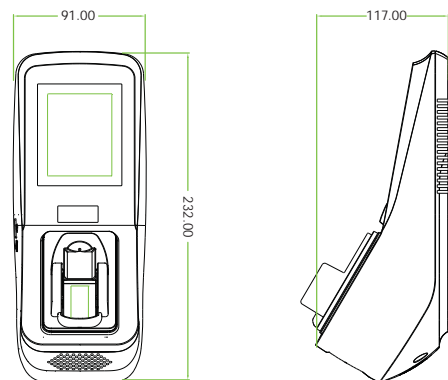

ZKTeco Europe.

Av. Camino de lo Cortao, 10. Nave 1.
28703 San Sebastián de los Reyes. Madrid. SPAIN
Tel: +34 916 532 891 E-mail: sales@zkteco.eu
www.zkteco.eu

© Copyright 2015. ZKTeco Inc. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

